

Optix Recessed 1200x300

OPTIX RECESSED 1200x300 2L 4000K C9 ALU SSH

0044215



Product features

- OPTIX RECESSED 1200x300 2L 4000K C9 ALU SSH is a high efficacy low glare luminaire for office and education applications with excellent colour rendering. Ceiling recessed 1200x300 mm. Aluminised plastic extra low glare optics in 2 lines configuration. White RAL9016 fixture body. SylSmart Connected Building capable. 4000K Neutral White LED, CRI>90, chromaticity tolerance of 3-step MacAdam ellipse. Luminous flux 3500lm. Power consumption 29W. Luminaire efficacy 121lm/W. Lumen maintenance of L90B50 = 44000h, L90B10 = 39000h. UGR<16, Luminance at 65°<200 Cd/m2, IK07, IP20. Photobiological safety risk group 0. Electrical protection Class I. Glow wire test 850°C.



PRODUCT OVERVIEW

IPC Code	0044215
Product name	OPTIX RECESSED 1200x300 2L 4000K C9 ALU SSH
Technology	LED (3 SDCM)
Housing	STEEL
Mount	Recessed
Fixture rating	Enclosed
General application	Office, Education,
Certifications	EUNEW021
ETIM Class	EC002892
Fixture luminous flux (lm)	3500
Luminaire efficacy (lm/W)	125
Colour temperature (K)	4000
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Glare control	16
Photobiological Risk Group	0
Total power consumption (W)	29
Electrical protection	Class I
Control gear type	SylSmart SSH
Dimmable	Yes
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016
IP rating	IP20
IK rating	IK07
Product EAN number	5410288442150
Chromaticity coordinate Y	0.3797
Lamps	Yes
Included lamp	INTEGRATED LED

DATA TABLE

General data

IPC Code	0044215
Product name	OPTIX RECESSED 1200x300 2L 4000K C9 ALU SSH

Optix Recessed 1200x300

OPTIX RECESSED 1200x300 2L 4000K C9 ALU SSH

0044215

Technology	LED (3 SDCM)
Housing	STEEL
Mount	Recessed
Fixture rating	Enclosed
General application	Office, Education,
Certifications	EUNEW021
ETIM Class	EC002892

Optical data

Fixture luminous flux (lm)	3500
Luminaire efficacy (lm/W)	125
Colour temperature (K)	4000
CRI (Ra)	90
Colour Variation Initial (SDCM)	3
Glare control	16
Photobiological Risk Group	0

Electrical data

Total power consumption (W)	29
Mains voltage (V)	220-240V~
Lamp power factor	0.96
Electrical protection	Class I
Control gear required	No
Control gear type	SylSmart SSH
Dimmable	Yes
Drive current (mA)	270
Inrush Current (A)	25
Inrush Duration (µs)	177
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 16A C Breaker	56

Lifetime data

Lumen maintenance - L70 B50	72000
Lumen maintenance - L80 B10	72000
Lumen maintenance - L90 B50	44000
Lumen maintenance - L90 B20	41000
Lumen maintenance - L90 B10	39000

Physical data

Housing colour	RAL 9016
IP rating	IP20
IK rating	IK07
Diffuser finish	Satin
Diffuser material	Polycarbonate
Nominal Product Length (mm)	1196
Nominal Product Width (mm)	296
Nominal Product Height (mm)	38

Optix Recessed 1200x300

OPTIX RECESSED 1200x300 2L 4000K C9 ALU SSH

0044215

Weight (kg)	5.0
-------------	-----

Packaging


Single packaging type	Carton
Product EAN number	5410288442150
Packaging single length / height (cm)	124.5
Packaging single width (cm)	6.5
Packaging single depth (cm)	32.0
DUN14 (outer)	05410288442150
Units per outer package	1
Packaging outer length / height (cm)	124.5
Packaging outer width (cm)	6.5
Packaging outer depth (cm)	32.0

PHOTOMETRY

0.5	0.76	E(0°) E(C0)	37.4°	9954 2256
1.0	1.53	E(0°) E(C0)	37.4°	2239 564
1.5	2.29	E(0°) E(C0)	37.4°	996 251
2.0	3.06	E(0°) E(C0)	37.4°	560 141
2.5	3.82	E(0°) E(C0)	37.4°	386 93
3.0	4.59	E(0°) E(C0)	37.4°	249 63

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 74.8°)

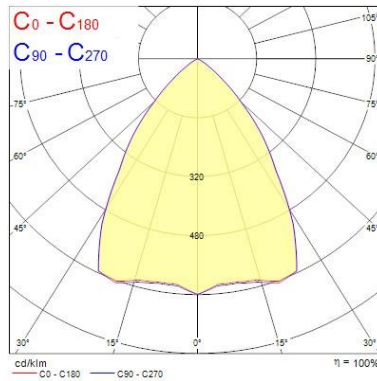

TECHNICAL DRAWINGS





Optix Recessed 1200x300

OPTIX RECESSED 1200x300 2L 4000K C9 ALU SSH


0044215


SYLVANIA 0044215


 This luminaire contains built in LED lamps.

 } **LED**


The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

SYLVANIA 0044215  874/2012