

Optix Recessed 1250x310

OPTIX RECESSED 1250x310 2L 4000K ALU SSC

0044229



Product features

- OPTIX RECESSED 1250x310 2L 4000K ALU SSC is a high efficacy low glare luminaire for office and education applications. Ceiling recessed 1250x310 mm. Aluminised plastic extra low glare optics in 2 lines configuration. White RAL9016 fixture body. SylSmart Stand-alone Office capable. 4000K Neutral White LED, CRI>80, chromaticity tolerance of 3-step MacAdam ellipse. Luminous flux 3600lm. Power consumption 27W. Luminaire efficacy 133lm/W. Lumen maintenance of L90B50 > 72000h, L90B10 = 46000h. UGR<16, Luminance at 65°<200 Cd/m², IK07, IP20. Photobiological safety risk group 0. Electrical protection Class I. Glow wire test 850°C.



PRODUCT OVERVIEW

IPC Code	0044229
Product name	OPTIX RECESSED 1250x310 2L 4000K ALU SSC
Technology	LED (3 SDCM)
Housing	STEEL
Mount	Recessed
Fixture rating	Enclosed
General application	Office, Education,
Certifications	EUNEW021
ETIM Class	EC002892
Fixture luminous flux (lm)	3600
Luminaire efficacy (lm/W)	133
Colour temperature (K)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	16
Photobiological Risk Group	0
Total power consumption (W)	27
Electrical protection	Class I
Control gear type	DALI
Dimmable	Yes
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016
IP rating	IP20
IK rating	IK07
Product EAN number	5410288442297
Chromaticity coordinate Y	0.3797
Lamps	No
Included lamp	INTEGRATED LED

DATA TABLE

General data

IPC Code	0044229
Product name	OPTIX RECESSED 1250x310 2L 4000K ALU SSC

Optix Recessed 1250x310

OPTIX RECESSED 1250x310 2L 4000K ALU SSC

0044229

Technology	LED (3 SDCM)
Housing	STEEL
Mount	Recessed
Fixture rating	Enclosed
General application	Office, Education,
Certifications	EUNEW021
ETIM Class	EC002892

Optical data

Fixture luminous flux (lm)	3600
Luminaire efficacy (lm/W)	133
Colour temperature (K)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	16
Photobiological Risk Group	0

Electrical data

Total power consumption (W)	27
Starting time (max) (s)	<0.7
Mains voltage (V)	220-240V~
Lamp power factor	0.98
THD (at 230 V, 50 Hz, full load, at 100% dimming level) = xx.x %	9
Electrical protection	Class I
Control gear required	No
Control gear type	DALI
Dimmable	Yes
Drive current (mA)	250
Inrush Current (A)	29
Inrush Duration (µs)	180
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	21
Max. Luminaires per 13A C Breaker	28
Max. Luminaires per 16A C Breaker	36
Max. Luminaires per 20A C Breaker	45
Max. Luminaires per 10A B Breaker	13
Max. Luminaires per 13A B Breaker	17
Max. Luminaires per 16A B Breaker	22
Max. Luminaires per 20A B Breaker	27

Lifetime data

Lumen maintenance - L70 B50	72000
Lumen maintenance - L80 B10	72000
Lumen maintenance - L90 B50	72000
Lumen maintenance - L90 B20	50000
Lumen maintenance - L90 B10	46000

Optix Recessed 1250x310

OPTIX RECESSED 1250x310 2L 4000K ALU SSC

0044229

Physical data

Housing colour	RAL 9016
IP rating	IP20
IK rating	IK07
Diffuser finish	Satin
Diffuser material	Polycarbonate
Nominal Product Length (mm)	1246
Nominal Product Width (mm)	308.5
Nominal Product Height (mm)	38
Weight (kg)	5.7

Packaging

Single packaging type	Carton
Product EAN number	5410288442297
DUN14 (outer)	05410288442297
Units per outer package	1
Packaging outer length / height (cm)	137.0
Packaging outer width (cm)	36.0
Packaging outer depth (cm)	9.0


PHOTOMETRY

Distance [m]	Cone diameter [m]	E(0°)	E(C90)	E(C0)
0.5	0.76 0.76	9247	2347	2347
1.0	1.53 1.52	2312	597	597
1.5	2.29 2.29	1027	261	261
2.0	3.06 3.05	573	147	147
2.5	3.82 3.81	370	94	94
3.0	4.59 4.57	257	66	66


Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 74.6°)

— C90 - C270 (Half beam angle: 74.6°)

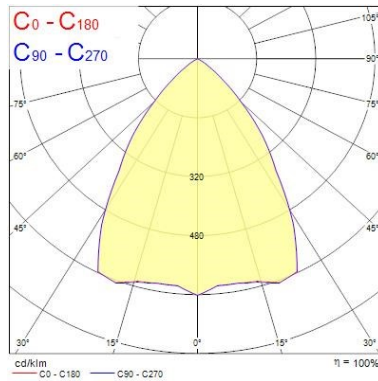

TECHNICAL DRAWINGS





Optix Recessed 1250x310

OPTIX RECESSED 1250x310 2L 4000K ALU SSC


0044229


SYLVANIA 0044229


 This luminaire contains built in LED lamps.

 } **LED**


The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

SYLVANIA 0044229  874/2012