

## RANA Linear Recessed - Louvre+Prismatic Optic

RANA LINEAR R 3KLM NW LOUV+PRI EM  
0052360



### Product features

- Ceiling recessed LED Linear luminaire with Louvre + Micro Prismatic Optic, Dimensions: 1154mm x 90mm x 91mm, Direct, White Body, Emergency 3 hours maintained, Neutral White LED (4000K), 3160lm, 31W, 102lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse), Low LED Flicker (+/- 5%), UGR<19, L90B10 at 50,000 hours, Electric Class1, Glow Wire Test 850°C, Can be covered with building insulation of Glass wool type



### PRODUCT OVERVIEW

IPC Code	0052360
Product name	RANA LINEAR R 3KLM NW LOUV+PRI EM
Technology	LED
Housing	Steel
Mount	Ceiling recessed
Fixture rating	Enclosed
Environment	Internal
General application	Office,Hospitality,Retail,Education,
Certifications	EUNEW001
ETIM Class	EC002892
Fixture luminous flux (lm)	3160
Luminaire efficacy (lm/W)	101.93
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Glare control	UGR<19
Photobiological Risk Group	Group 0
Total power consumption (W)	31
Electrical protection	Class I
Control gear type	Electronic
Housing colour	White RAL 9016
IP rating	IP20
IK rating	IK07
Product EAN number	5410288523606
Luminous flux (emergency) (lm)	550
Lamps	Yes
Included lamp	INTEGRATED LED

## RANA Linear Recessed - Louvre+Prismatic Optic

*RANA LINEAR R 3KLM NW LOUV+PRI EM*  
0052360

### DATA TABLE

#### General data

IPC Code	0052360
Product name	RANA LINEAR R 3KLM NW LOUV+PRI EM
Technology	LED
Housing	Steel
Mount	Ceiling recessed
Fixture rating	Enclosed
Environment	Internal
General application	Office,Hospitality,Retail,Education,
Operating temperature range (°C)	+5 to +30
Certifications	EUNEW001
ETIM Class	EC002892

#### Optical data

Fixture luminous flux (lm)	3160
Luminaire efficacy (lm/W)	101.93
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Adjustable chromaticity	N
Distribution type	Direct
Glare control	UGR<19
Photobiological Risk Group	Group 0
Emergency duration (h)	3.0

#### Electrical data

Total power consumption (W)	31
Mains voltage (V)	220-240V~
Electrical protection	Class I
Control gear type	Electronic
Drive current (mA)	275
Inrush Current (A)	53
Inrush Duration (µs)	100
Glow Wire Test (°C)	850
Lamp Energy Label (class)	A++
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 16A C Breaker	51

#### Lifetime data

Lumen maintenance - L70 B50	60000
Lumen maintenance - L70 B20	60000
Lumen maintenance - L70 B10	60000
Lumen maintenance - L80 B50	60000
Lumen maintenance - L80 B20	60000
Lumen maintenance - L80 B10	60000

## RANA Linear Recessed - Louvre+Prismatic Optic

### RANA LINEAR R 3KLM NW LOUV+PRI EM

### 0052360

Lumen maintenance - L90 B50	60000
Lumen maintenance - L90 B20	60000
Lumen maintenance - L90 B10	60000


#### Physical data

Housing colour	White RAL 9016
IP rating	IP20
IK rating	IK07
Diffuser finish	Louvre + Prismatic Optic
Diffuser material	Polycarbonate
Reflector finish	Satin Aluminium Reflector
Nominal Product Length (mm)	1150
Nominal Product Width (mm)	90
Nominal Product Height (mm)	91
Weight (kg)	3.65
Recessed Depth (mm)	90


#### Packaging

Single packaging type	Carton
Product EAN number	5410288523606
Packaging single length / height (cm)	117.0
Packaging single width (cm)	10.5
Packaging single depth (cm)	11.5
DUN14 (outer)	5410288523606
Units per outer package	1
Packaging outer length / height (cm)	117.0
Packaging outer width (cm)	10.5
Packaging outer depth (cm)	11.5


## PHOTOMETRY

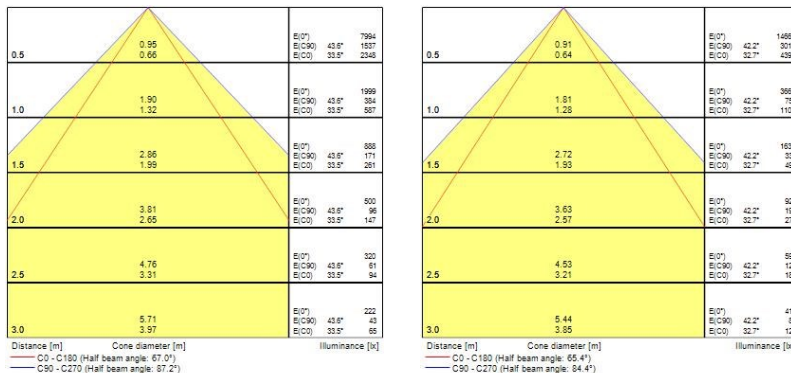

## RANA Linear Recessed - Louvre+Prismatic Optic *RANA LINEAR R 3KLM NW LOUV+PRI EM* 0052360

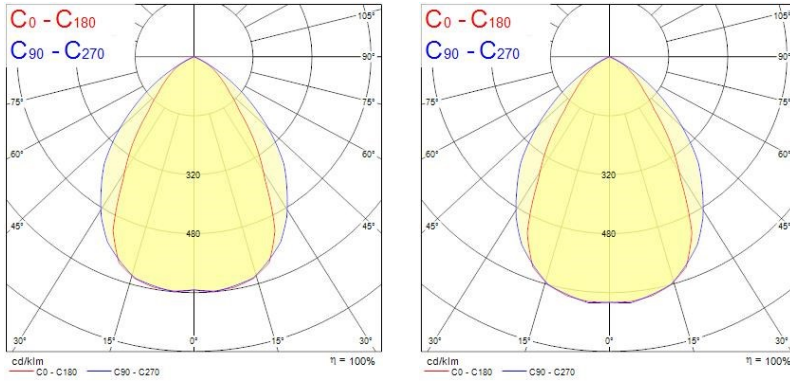

### TECHNICAL DRAWINGS

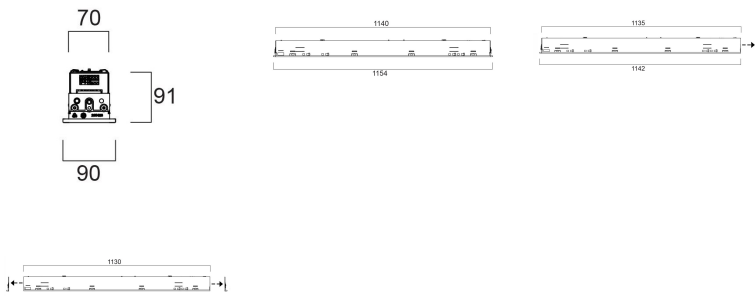

## RANA Linear Recessed - Louvre+Prismatic Optic RANA LINEAR R 3KLM NW LOUV+PRI EM 0052360

