


Myriad V Solid State Pendant - Black - Surface Mounted

MYRIAD PENDANT 3000K SURFACE PHDIM BLK
2049579



Product features

- High-end architectural (3000K) warm white LED pendant with Phase dimmable driver and surface mounted housing, finished in a black finish (RAL9005)



PRODUCT OVERVIEW

IPC Code	2049579
Product name	MYRIAD PENDANT 3000K SURFACE PHDIM BLK
Technology	LED
Mount	Ceiling pendant
Environment	Interior
General application	Hospitality,Office,Retail,Residential & Consumer
Certifications	EUNEW009
ETIM Class	EC001743
E-number SE	7561424
E-number Norway	3290204
Fixture luminous flux (lm)	1114
Luminaire efficacy (lm/W)	111.4
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Beam Angle (°)	30
Photobiological Risk Group	-
Total power consumption (W)	10
Electrical protection	Class II
Control gear mounting	Integral
Dimmable	Yes
Housing colour	Black
IP rating	IP20
IK rating	IK02
Product EAN number	5025768495795
Lamps	No
Included lamp	INTEGRATED LED

Myriad V Solid State Pendant - Black - Surface Mounted

MYRIAD PENDANT 3000K SURFACE PHDIM BLK
2049579

DATA TABLE

General data

IPC Code	2049579
Product name	MYRIAD PENDANT 3000K SURFACE PHDIM BLK
Technology	LED
Mount	Ceiling pendant
Environment	Interior
General application	Hospitality,Office,Retail,Residential & Consumer
Certifications	EUNEW009
ETIM Class	EC001743
E-number SE	7561424
E-number Norway	3290204

Optical data

Fixture luminous flux (lm)	1114
Luminaire efficacy (lm/W)	111.4
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Adjustable chromaticity	N
Beam Angle (°)	30
Distribution type	Direct symmetrical
Photobiological Risk Group	-

Electrical data

Total power consumption (W)	10
Mains voltage (V)	220-240V~
Electrical protection	Class II
Control gear mounting	Integral
Transformer required	Yes
Dimmable	Yes
Nominal Frequency (Hz)	50/60Hz

Lifetime data

Lumen maintenance - L70 B50	50000
-----------------------------	-------

Physical data

Housing colour	Black
IP rating	IP20
IK rating	IK02
Nominal Product Width (mm)	75
Nominal Product Height (mm)	129
Max. Lamp Diameter (mm) - D	75
Weight (kg)	0.95


Packaging

Myriad V Solid State Pendant - Black - Surface Mounted

MYRIAD PENDANT 3000K SURFACE PHDIM BLK
2049579

Single packaging type	Carton
Product EAN number	5025768495795
Packaging single length / height (cm)	17.5
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
DUN14 (outer)	05025768495795
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5


PHOTOMETRY

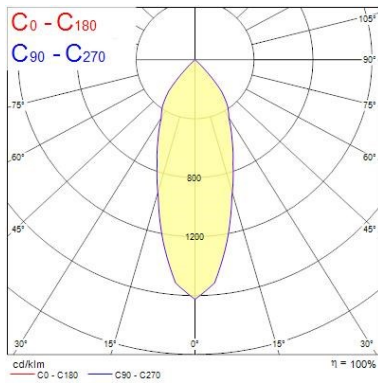

Distance [m]	Cone diameter [m]	E _v (0°) [lx]	E _v (C0) [lx]
0.5	0.33	7241	3101
1.0	0.67	1810	775
1.5	1.00	805	345
2.0	1.34	483	194
2.5	1.67	290	124
3.0	2.01	201	86


Distance [m] Cone diameter [m]
C0 - C180 (Half beam angle: 37.0°) Illuminance [lx]


TECHNICAL DRAWINGS




Myriad V Solid State Pendant - Black - Surface Mounted *MYRIAD PENDANT 3000K SURFACE PHDIM BLK* 2049579


Concord 2049579


 This luminaire contains built in LED lamps.

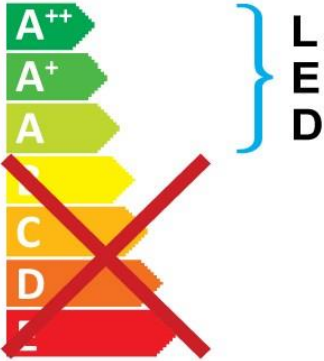


The lamps cannot be changed in the luminaire.

874/2012 

 This luminaire contains built in LED lamps.

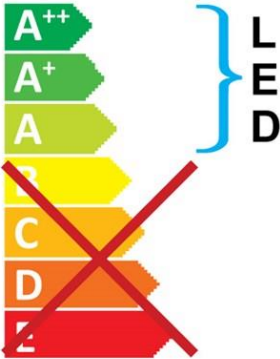

The lamps cannot be changed in the luminaire.

Concord 2049579  874/2012