

Rubico LED 1200

RUBICO LED 1200x300 HE 4K DALI EMPRO

0044289



Product features

- RUBICO LED 1200x300 HE 4K DALI EMPRO is a direct / indirect low glare luminaire for office and education applications. Ceiling recessed 1200x300mm. Micro Prismatic optics. White RAL 9016. DALI dimmable. 3 hours emergency operation with integral batteries and DALI monitoring capability. 4000K Neutral White LED, Typical CRI=85, chromaticity tolerance of 3-step MacAdam ellipse, lumen package of 2,950lm, total power consumption 30W, efficacy of 98lm/W . Lumen maintenance of L80B10 at 60,000 hours, UGR<19. IK07, IP20, Electrical Protection Class I. PC diffuser, Glow Wire test 850°C



PRODUCT OVERVIEW

IPC Code	0044289
Product name	RUBICO LED 1200x300 HE 4K DALI EMPRO
Technology	LED
Mount	Recessed
General application	Education, Hospitality, Office, Retail
Certifications	EUNEW001
ETIM Class	EC002892
Fixture luminous flux (lm)	2950
Luminous flux (lm)	2950
Luminaire efficacy (lm/W)	98
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Glare control	UGR<19
Photobiological Risk Group	0
Luminous flux (emergency) (lm)	339
Total power consumption (W)	30
Electrical protection	Class I
Housing colour	White RAL 9016
IP rating	IP20
IK rating	IK07
Product EAN number	5410288442891
Lamps	Yes
Included lamp	INTEGRATED LED

DATA TABLE

General data

IPC Code	0044289
Product name	RUBICO LED 1200x300 HE 4K DALI EMPRO
Technology	LED
Mount	Recessed

Rubico LED 1200

RUBICO LED 1200x300 HE 4K DALI EMPRO

0044289

General application	Education,Hospitality,Office,Retail
Operating temperature range (°C)	+5°C to +50°C
Certifications	EUNEW001
ETIM Class	EC002892

Optical data

Fixture luminous flux (lm)	2950
Luminous flux (lm)	2950
Luminaire efficacy (lm/W)	98
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Distribution type	Direct / Indirect
Glare control	UGR<19
Photobiological Risk Group	0
Luminous flux (emergency) (lm)	339
Emergency duration (h)	3.0

Electrical data

Total power consumption (W)	30
Mains voltage (V)	220-240V~
Electrical protection	Class I
Drive current (mA)	500
Glow Wire Test (°C)	850
Lamp Energy Label (class)	A+
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	21
Max. Luminaires per 13A C Breaker	28
Max. Luminaires per 16A C Breaker	35
Max. Luminaires per 20A C Breaker	45
Max. Luminaires per 10A B Breaker	13
Max. Luminaires per 13A B Breaker	17
Max. Luminaires per 16A B Breaker	21
Max. Luminaires per 20A B Breaker	27

Lifetime data

Lumen maintenance - L70 B50	60000
Lumen maintenance - L70 B20	60000
Lumen maintenance - L70 B10	60000
Lumen maintenance - L80 B50	60000
Lumen maintenance - L80 B20	60000
Lumen maintenance - L80 B10	60000
Lumen maintenance - L90 B50	35000
Lumen maintenance - L90 B20	31000
Lumen maintenance - L90 B10	28500

Physical data

Housing colour	White RAL 9016
IP rating	IP20

Rubico LED 1200





RUBICO LED 1200x300 HE 4K DALI EMPRO
0044289

IK rating	IK07
Diffuser finish	Micro Prismatic optic (MPO) with Satin Side diffuser
Diffuser material	Polycarbonate
Nominal Product Length (mm)	1196
Nominal Product Width (mm)	294
Nominal Product Height (mm)	80
Weight (kg)	7.0

Packaging


Single packaging type	Carton
Product EAN number	5410288442891
Packaging single length / height (cm)	123.0
Packaging single width (cm)	36.0
Packaging single depth (cm)	11.0
DUN14 (outer)	05410288442891
Units per outer package	1
Packaging outer length / height (cm)	123.0
Packaging outer width (cm)	36.0
Packaging outer depth (cm)	11.0

PHOTOMETRY

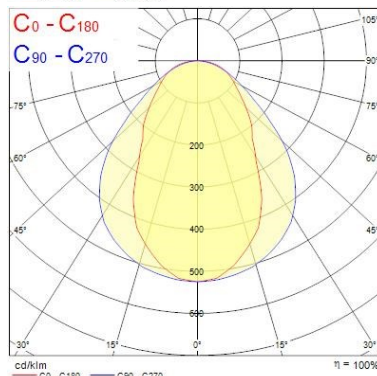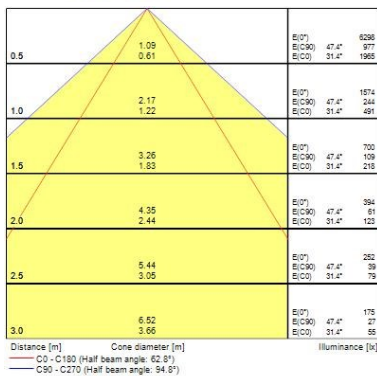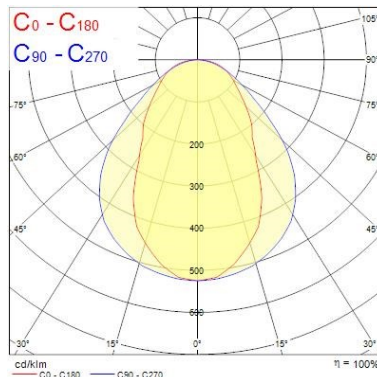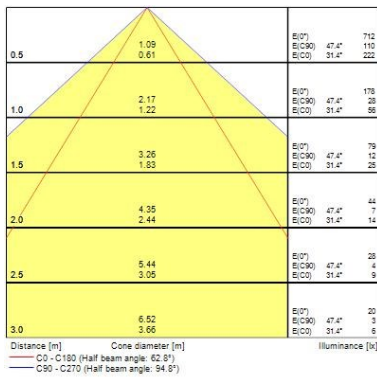


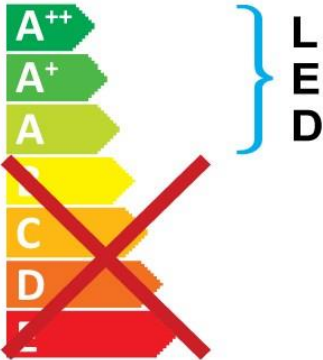
Rubico LED 1200
RUBICO LED 1200x300 HE 4K DALI EMPRO
0044289

TECHNICAL DRAWINGS




SYLVANIA 0044289

 This luminaire contains built in LED lamps.



The lamps cannot be changed in the luminaire.

874/2012 

Rubico LED 1200

RUBICO LED 1200x300 HE 4K DALI EMPRO

0044289

This luminaire contains built in LED lamps.

The lamps cannot be changed in the luminaire.

SYLVANIA 0044289 874/2012

A++
A+
A
~~B~~
~~C~~
~~D~~
~~E~~

LED